



Unbreakable Internet. VPN Connectivity. Bandwidth Bonding.

Balance 1350





SD-WAN router combining 13 WAN links designed for large enterprises.

The Peplink Balance 1350 is one of the most powerful routers of our Balance portfolio. Delivering unbreakable connectivity to high-end enterprise users by combining the speed of 13 WAN connections with a maximum throughput of 5Gbps.



Greater Speeds, Absolute Reliability, up to 90% Cost Reduction

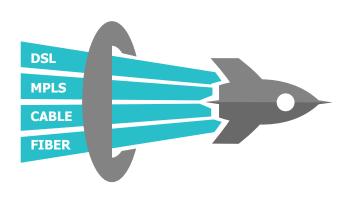



Using SpeedFusion™ bandwidth bonding technology, you can combine multiple DSL, cable, 4G LTE, and 3G links – up to 13 of them into a single high-speed SD-WAN connection. This enables you to access headquarters at greater speeds than you could achieve with a single link.

With each link you add, the SD-WAN connection increases its reliability. Use multiple connection technologies from diverse ISPs to provide connectivity resilience at a fraction of what it would cost using traditional WAN alone.

Intelligent VPN Traffic Routing



Guarantee the session integrity of sensitive applications such as point-of-sale or credit card transactions using Hot failover. Stream HD videos and have smooth videoconferences using SpeedFusion VPN technology. Use your commodity links to offload for your bulk traffic to the public Internet, while saving your critical traffic for private links.

Simple, Powerful Cloud Management



Using InControl, our powerful SD-WAN controller, you can easily perform a multitude of tasks from a browser. Set up a star, mesh, or point-to-point VPN with just a couple of clicks. Configure groups of devices at once to save time. Schedule automatic firmware updates for your devices.



SPECIFICATIONS

Product Details

Model: Balance 1350Product Code: BPL-135

Designed For: Large Enterprise/Campus

Capacity

• Ethernet WAN Ports: 13 (GE)

• LAN Ports: 3 (GE)

• Simultaneous Dual-Band 802.11ac/a/b/g/n Wi-Fi AP: No

Embedded 4G LTE: No
SIM Card Size: No
USB WAN Modem Port¹: 1

Recommended Users²: 1000-5000
 Stateful Firewall Throughput³: 5Gbps

Core Functionality

• 802.1q VLANs supported: 1024

· Port-Based VLAN: Yes

Load Balancing & Failover: YesLoad Balancing Algorithms: 8

· Drop-In Mode: Yes

Inbound Load Balancing: YesInControl Cloud Management: Yes

PepVPN/SpeedFusion Functionality

• PepVPN: Yes

SpeedFusion Hot Failover: YesSpeedFusion WAN Smoothing: Yes

SpeedFusion Bandwidth Bonding: Yes

Number of PepVPN/SpeedFusion Peers⁴: 800
 PepVPN Throughput (256-bit AES)³: 800Mbps

• PepVPN Throughput (No Encryption)3: 800Mbps

AP Controller Functionality

• Manage Pepwave AP Series: Yes

· Maximum Number of AP Supported: 500

• Manage Remote AP & Multiple Config Profiles6: Yes

IPsec/L2TP/PPTP VPN Functionality

• IPsec VPN (Network-to-Network)5: Yes

Number of IPsec Tunnels: 400

Remote User Access: Yes

L2TP VPN / OpenVPN / PPTP VPN Server: Yes
Maximum PPTP/L2TP/OpenVPN Users: 500

• GRE (Network-to-Network): 5

Advanced QoS Functionality

· Bandwidth Usage Monitor: Yes

QoS for VoIP and E-commerce: Yes
 User Groups Bandwidth Control: Yes

• Web Blocking: Yes

· Web Filtering Blacklist: Full

Hardware

Operating Temperature: 0° - 40°C
 Dimensions: 44 x 426 x 305 mm

• Weight: 7 kg

• LACP (802.3ad) NIC Bonding: Yes

• Power Consumption: 70W

• 1U Rackmount: Yes

• High Availability: Yes

• LAN Bypass: Yes

· Dual Hot Swap Power Supply: No

Certifications

· FCC, CE, RoHS

Warranty

· 1-Year Limited Warranty

Package Content

- Balance 1350 Router
- Power Cord (ACW-614)
- 1 Pair of Mounting Brackets (ACW-382)

E-mail: info@risingconnection.com.au

¹ For a list of supported modems, please refer to https://www.peplink.com/technology/4g3g-modem-support.

² Recommendation for sizing purposes only. No software restrictions applied.

³ Router Throughput and PepVPN/SpeedFusion Throughput is based on Ethernet frame sizes of 1280 or 1518 bytes. Actual performance can vary across different networking environments. Figures apply to the latest hardware revision.

⁴ Number of peer Peplink or Pepwave devices you can connect using SpeedFusion VPN.

⁵ IPsec only supports connection with Cisco, Juniper, Peplink or Pepwave devices.

⁶ Balance 1350 comes with AP Controller Pro, which supports multiple configuration profiles with multiple SSIDs, and you can manage remote APs outside the local physical LAN.



ORDERING INFORMATION

Product Code	Model	Description
BPL-135	Balance 1350	13x GE WAN ports and 3x GE LAN ports. SpeedFusion capable.

Why Rising Connection is using equipment designed and built by Peplink?

- Industry leader in both ISP & Data Bonding across multiple technology platforms
- Reliable hardware from entry level professional equipment through to advanced Enterprises solutions
- Worldwide supported and local support here in Australia by fully trained technicians
- · Reliable and secure redundancy paths for mission critical sites
- Designed for maximum possible business uptime

This demonstrates to Rising Connection that you will have the Quality, Reliability and Product Support.

PO Box 4107 Carlton NSW 2218

E-mail: info@risingconnection.com.au

www.risingconnection.com.au

ABN 50 161 068 042