


 Software Defined Power  
 Distribution Unit


pep|link | PEPWAVE

PDU




## SPECIFICATIONS


- **Features:** Input Voltage: 110V / 220V AC, Output Voltage/Current monitoring, IoT Cloud Manage, remote on/off, OLED Display
- **WAN Interface:** 1x USB, 1x 10/100 RJ45
- **Power Input:** 110V / 220V AC
- **Inlet:** 2x IEC C20
- **Outlet:** 7x IEC C14
- **Enclosure:** Indoor Metal
- **Dimensions:** 19 x 7.5 x 1.7 inches
- **Weight:** 3 kg
- **Operating Temperature:** -20° – 65°C
- **Humidity:** 15% – 95% (non-condensing)
- **Certifications:** FCC / CE / ICC
- **Warranty:** 1-Year Limited Warranty

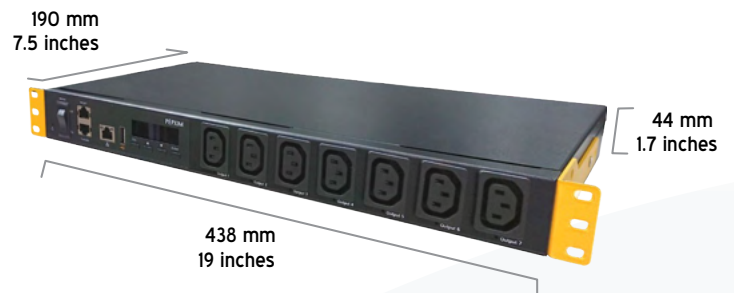

## Front

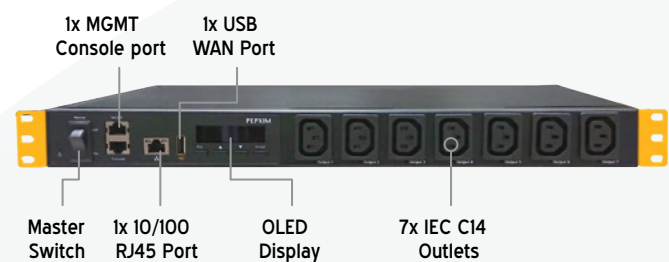

## Back

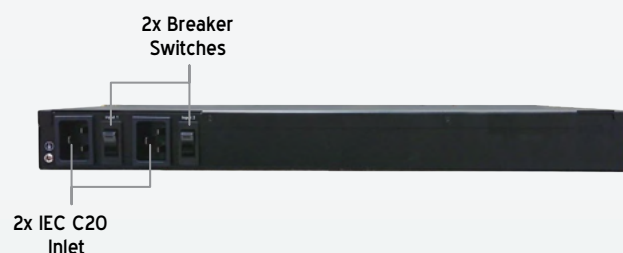



## ORDERING INFORMATION

Product Code	3G Bands
PDU-7S-110V	SD Power Distribution Unit, 110V
PDU-7S-220V	SD Power Distribution Unit, 220V

---

### Why Rising Connection is using equipment designed and built by Peplink?

- Industry leader in both ISP & Data Bonding across multiple technology platforms
- Reliable hardware from entry level professional equipment through to advanced Enterprises solutions
- Worldwide supported and local support here in Australia by fully trained technicians
- Reliable and secure redundancy paths for mission critical sites
- Designed for maximum possible business uptime

This demonstrates to Rising Connection that you will have the Quality, Reliability and Product Support.

---